

Total No. of Questions : 8]

[Total No. of Printed Pages : 4

Roll No

CE-5002-CBGS

B.E. V Semester

Examination, December 2020

Choice Based Grading System (CBGS)

Quantity Surveying and Costing

Time : Three Hours

Maximum Marks : 70

- Note:** i) Attempt any five questions.
ii) All questions carry equal marks.
iii) Assume missing data suitably.

1. a) Explain purpose and principles of Estimating. 7
b) Explain different types of Estimates. 7
2. a) Which factors affecting the cost of work? 7
b) Explain work charge establishment in detail. 7
3. Explain different methods for Estimating building works. 14
4. a) Define rate analysis. Mention various purpose of rate analysis. 7
b) List out factors affecting the rate analysis. State the requirements of rate analysis. 7
5. a) Explain scrap value, salvage value, sinking fund, depreciation. 7

CE-5002-CBGS

PTO

[2]

- b) In a plot of land costing Rs. 60,000 a building has been newly constructed at a total cost of Rs.4,40,000 including sanitary and water supply works, electrical installation etc. The building consists of four flats for four tenants. The owner expects 8 percent return on the cost of construction and 5 percent return on the cost of land. Calculate the standard rent for each flat of the building assuming. 7
- i) The life of building is 60 years and sinking fund will be created on 4% interest basis.
 - ii) Annual repairs cost at 1% of the cost of the construction.
 - iii) Other outgoings including taxes at 30% of the net return on the building
6. Estimate the quantity of earth work for an embankment, 120m long, 8m wide at crest and whose side slopes are 2 in 1. The central height from 0 to 30m intervals are 0.60m, 1.2m, 1.6m, 2.0m and 2.3m. Calculate the earth work using mid section formulae and trapezoidal formulae? 14
7. A detailed estimate of a R.C.C. column with foundation footing from given below drawing. 14
8. Estimate the quantities of the following items of a two roomed building from the given below the plan and section? 14
- i) Earth work in excavation in foundation
 - ii) Lime concrete in foundation
 - iii) 1st class brick work in cement mortar 1:6 in foundation and plinth
 - iv) 2.5cm C.C. damp proof course and
 - v) 1st class brick work in lime mortar in super structure

[3]

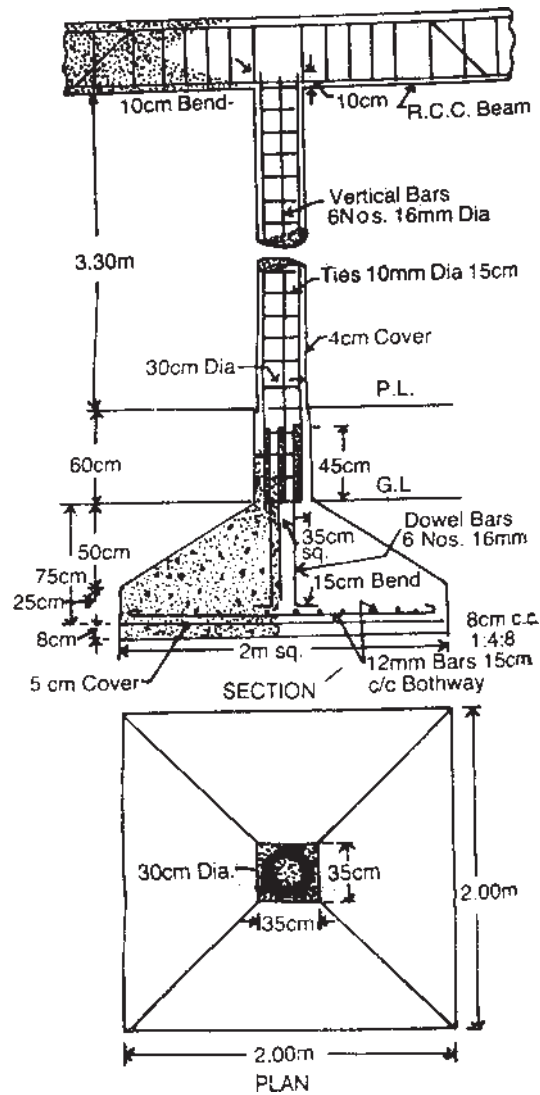


Figure for Q.No. 7

[4]

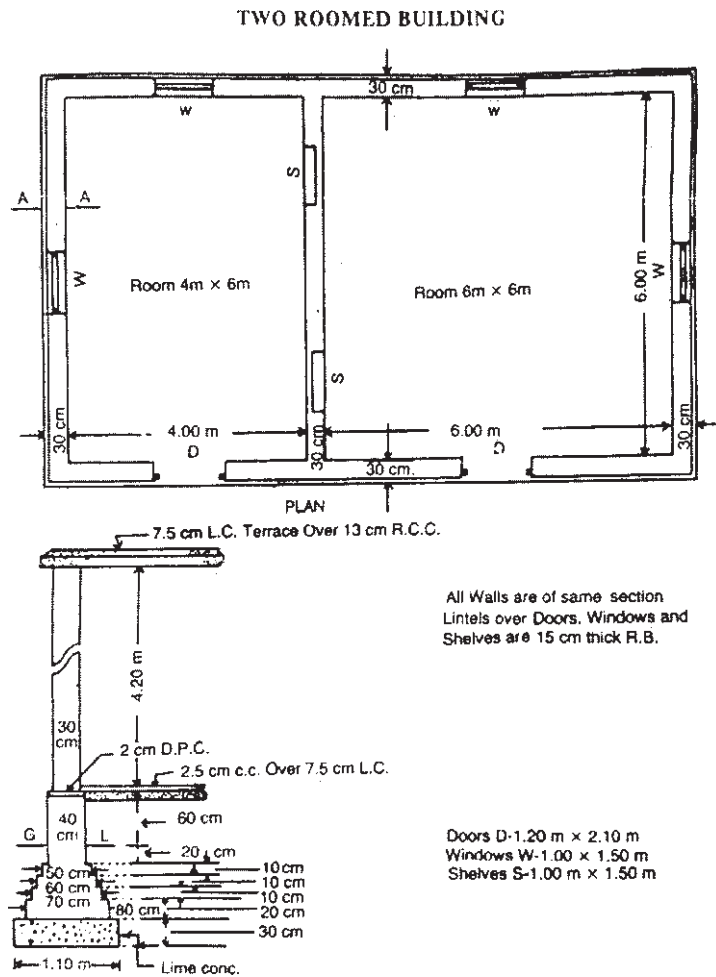


Figure for Q.No. 8
